


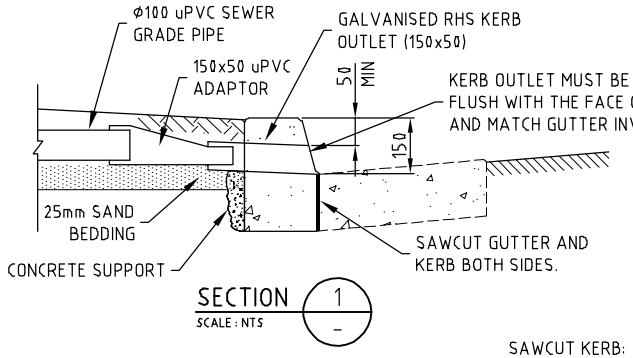


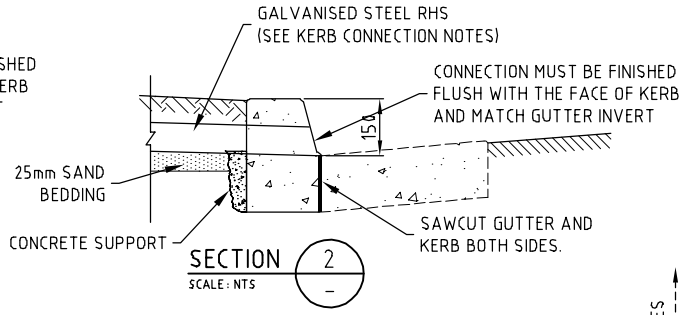


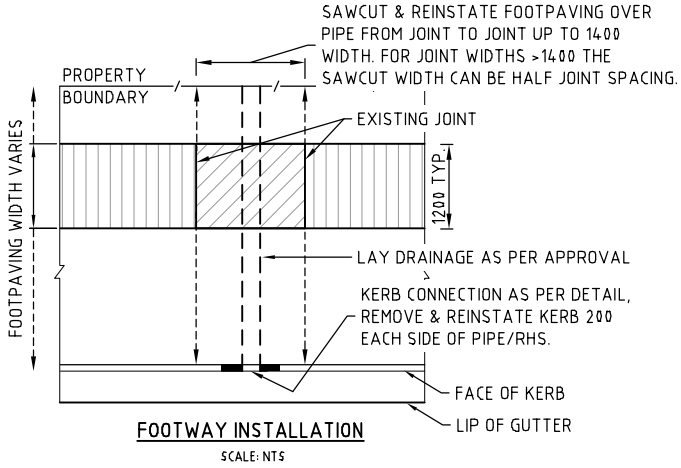


FOOTWAY INSTALLATION
SCALE: NTS

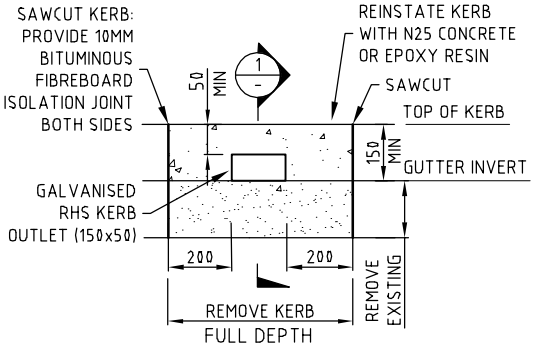

STORMWATER OUTLET CONNECTION TO 150 KERB
SCALE: NTS

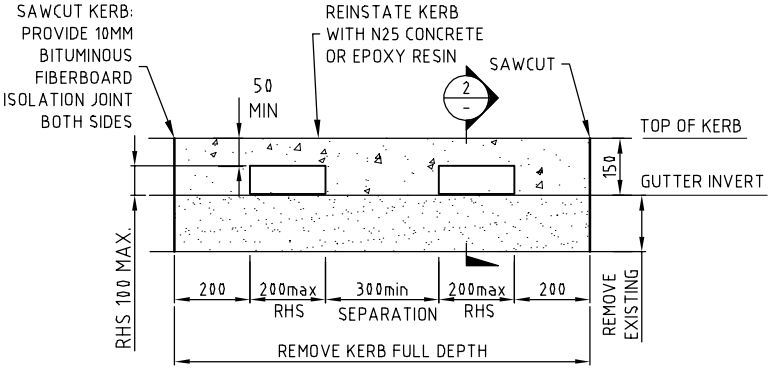

GALVANISED STEEL RHS
DIRECT CONNECTION TO 150 KERB
SCALE: NTS

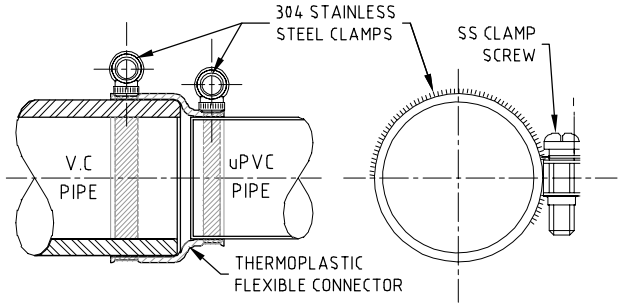

VITRIFIED CLAY (V.C) PIPE & uPVC
PIPE CONNECTION DETAIL
SCALE: NTS

NOTES:

1. FOR PIPE TYPE, SIZE, AND LOCATION ACROSS FOOTWAY REFER TO THE APPROVED WORK PERMIT PLAN.
2. FOR PIPE LOCATION AND CLEARANCE REQUIREMENTS REFER TO CBC STD DWG S-004.
3. DEVELOPMENTS OTHER THAN SINGLE DWELLINGS AND DUAL OCCUPANCIES ARE TO USE HOT DIP GALVANISED STEEL RHS BOX SECTIONS 5MM THICK, 100 MAX HIGH AND 200 MAX WIDE, ACROSS THE FOOTWAY.
4. SINGLE DWELLINGS AND DUAL OCCUPANCIES MAY USE 100 DIA. uPVC PIPE FOR ROOF WATER OUTLET (RWO). PIPES TO BE EXTRA HEAVY DUTY SEWER GRADE - SN825N10.
5. SAWCUT AND REMOVE FOOTPAVING OVER PIPE FROM EXISTING JOINT TO EXISTING JOINT UP TO JOINT WIDTH OF 1400. FOR JOINT WIDTHS >1400 THE SAWCUT WIDTH CAN BE HALF JOINT SPACING.
6. PIPE ACROSS FOOTWAY TO BE LAID WITH MINIMUM FALL OF 1 IN 80 TO MAXIMISE COVER.
7. uPVC PIPES TO BE CONNECTED TO VC PIPES WITH APPROVED PROPRIETARY FLEXIBLE THERMOPLASTIC CONNECTOR AS DETAILED.
8. KERB CONNECTION TO BE SAWCUT AS DETAILED. REMOVE KERB SECTION FULL DEPTH.
9. KERB OUTLET/RHS IS TO MATCH GUTTER INVERT.
10. INVERT OF KERB OUTLET/RHS FOR PUMP OR CHARGED SYSTEMS TO BE 20MM HIGHER THAN INVERT OF GUTTER.
11. REINSTATE KERB BOTH SIDES USING N25 CONCRETE, EPOXY RESIN, OR 4:2:1.5 HAND MIX CONCRETE FULLY AROUND PIPE, PROVIDE 10MM BITUMEN FIBREBOARD ISOLATION JOINT BOTH SIDES.
12. REINSTATE FOOTPAVING TO MATCH EXISTING WITH ISOLATION JOINTS BOTH SIDES. REINSTATE ALL DISTURBED FOOTWAY AREAS TO MATCH EXISTING.

ALL DIMENSIONS ARE IN MILLIMETRES UNLESS NOTED OTHERWISE

CANTERBURY BANKSTOWN

CITY OF CANTERBURY BANKSTOWN

STANDARD PROPERTY DRAINAGE CONNECTION TO KERB & GUTTER

SECTIONS AND NOTES

STD DWG N°
S-107

Sheet N°: 1 of 1
Revision: 22/02/19

File Name: S-107.dwg